

WORKING BEYOND LIMITS



POWERBULLY 9C



Payload
9,000 kg | 19,900 lbs



Ground pressure
0.19 kg/cm² | 2.70 psi



Max. speed
14.5 km/h | 9.0 mph



Tare weight
11,080 kg | 24,400 lbs



Fording depth
1,200 mm | 47.2"



Gradeability
60 % uphill & downhill, 40 % sidehill

ENGINE & POWER

Type	Cummins B6.7 Turbo Diesel
No. of cylinders	6
Displacement	6.7 l / 6,700 ccm
Power Output @ 2,000 rpm	173 kW / 235 hp
Max. torque @ 1,500 rpm	949 Nm 700 ft lb
Emission standard	EU Stage V Tier 4f
Hydrostatic Bosch Rexroth drive train	

TANK VOLUMES

Diesel	250 l 66 gal
AdBlue	38 l 10 gal
Hydraulic oil	52 l 14 gal

CABIN


Wide cab	10.4" Touch Display	Sun blind
Suspended cab	Armrest with controls	Air-conditioned cup holder
ROPS / FOPS (Level I and II) certified	Heating, temperature and fan control	Limp home mode
Single-hand joystick operation	Air conditioning	
Adjustable operator's seat	12V power outlet	Illumination
2 axis inclination sensor	2 USB charging ports (type A and C)	6 LED working lights front and rear
Rear view camera	Mobile phone tray	

OPTIONS

Safety	Comfort	Cold start	Others
Premium LED working lights	Air suspended comfort seat	Heated fuel filter	Telematics
Beacon light	Adjustable steering wheel	Feeder pressure reduction	Reversible fan
Auxiliary lights (High and low beam, rear light, indicators)	Heated, electrically adjustable mirrors	Engine block heater 230V/110V	Frame extension 500 - 900 mm 19.7" - 35.4"
360° camera (on request)	Radio with Bluetooth and a hands-free kit	Electrical Hydraulic Oil Heating 230V/110V	Narrow cab
Foldable front brush guard		Auxiliary heating	Trailer coupling
FOPS level II protective grid			Air-intake in steel-version
Hydraulic winch (Tractive force: 9 t 19,000 lbs)			Cyclonic pre-separator for air intake

POWERBULLY 9C

DIMENSIONS

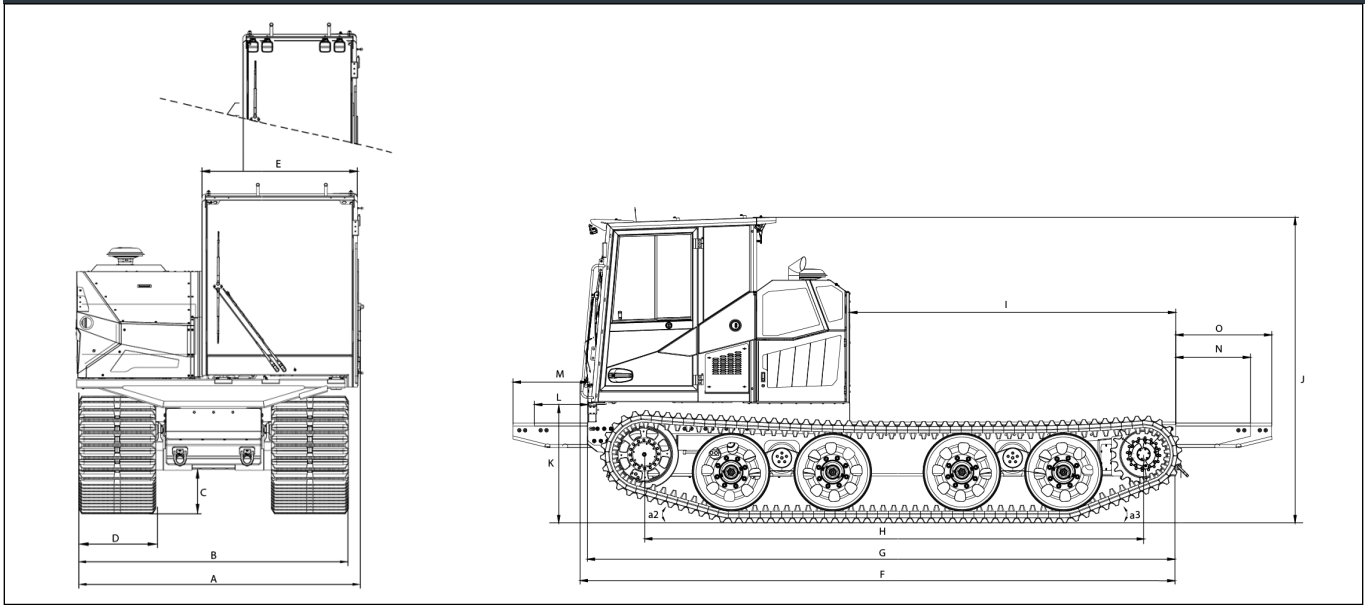

A 2,590 mm | 102"

B 2,450 mm | 96"

C 390 mm | 15.4"

D 700 mm | 27.6"

E 1412 mm | 55.6"

Optional: Narrow cab E 982 mm | 39"

F 5,652 mm | 223"

G 5,500 mm | 217"

H 4,672 mm | 184"

I 3,050 mm | 120"

J 2,857 mm | 112"

K 1,200 mm | 47.2"

L 500 mm | 19.7"

M 700 mm | 27.6"

N 700 mm | 27.6"

O 900 mm | 35.4"

a2 16° a3 22°

INTERFACES

PTO for attachments

Power 126 kW (600 Nm)

Rotation speed 828 - 2,376 rpm

Transmission 1:0.845

Mechanical

Frame type C-shaped profile with pre-drilled hole patterns


Frame width 864 mm | 34"

Electrical

Power supply for attachments 12 V or 24 V

Attachment interface

OFF-ROAD ABILITIES

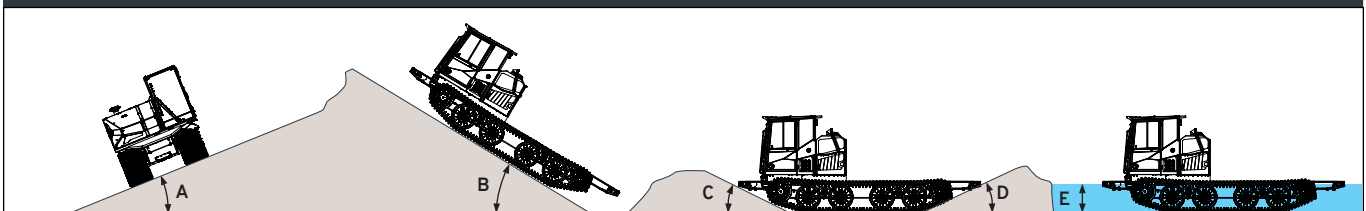

A Sidehill 40% | 22°

B Uphill | Downhill 60% | 31°

C Approach angle with 500 mm | 19.7" frame extension 31°
with 700 mm | 27.6" frame extension 26°

D Departure angle with 700 mm | 27.6" frame extension 29°
with 900 mm | 35.4" frame extension 24°

E Fording depth 1,200 mm | 47.2"



Learn more about PowerBully:
powerbully.com
sales@powerbully.com

PowerBully
TRACK CARRIER