



**WORKING
BEYOND
LIMITS**




POWERBULLY 12C

 **Payload**
13,200 kg | 29,100 lbs

 **Ground pressure**
0.22 kg/cm² | 3.12 psi

 **Max. speed**
14.5 km/h | 9.0 mph

 **Tare weight**
13,140 kg | 28,900 lbs

 **Fording depth**
1,300 mm | 51,2"

 **Gradeability**
60 % uphill & downhill, 40 % sidehill

ENGINE & POWER

Type	Cummins B6.7 Turbo Diesel
No. of cylinders	6
Displacement	6.7 l / 6,700 ccm
Power Output @ 2,000 rpm	209 kW / 285 hp
Max. torque @ 1,500 rpm	1,288 Nm 950 ft lb
Emission standard	EU Stage V Tier 4f
Hydrostatic Bosch Rexroth drive train	

TANK VOLUMES

Diesel	250 l 66 gal
AdBlue	38 l 10 gal
Hydraulic oil	52 l 14 gal

CABIN


Wide cab	10.4" Touch Display	Sun blind
Suspended cab	Armrest with controls	Air-conditioned cup holder
ROPS / FOPS (Level I and II) certified	Heating, temperature and fan control	Limp home mode
Single-hand joystick operation	Air conditioning	
Adjustable operator's seat	12V power outlet	Illumination
2 axis inclination sensor	2 USB charging ports (type A and C)	6 LED working lights front and rear
Rear view camera	Mobile phone tray	

OPTIONS

Safety	Comfort	Cold start	Others
Premium LED working lights	Air suspended comfort seat	Heated fuel filter	Telematics
Beacon light	Adjustable steering wheel	Feeder pressure reduction	Reversible fan
Auxiliary lights (High and low beam, rear light, indicators)	Heated, electrically adjustable mirrors	Engine block heater 230V/110V	Frame extension 700 - 1,100 mm 27.6"-43.3"
360° camera (on request)	Radio with Bluetooth and a hands-free kit	Electrical Hydraulic Oil Heating 230V/110V	Narrow cab
Foldable front brush guard		Auxiliary heating	Trailer coupling
FOPS level II protective grid			Air-intake in steel-version
Hydraulic winch (Tractive force: 9 t 19,000 lbs)			Cyclonic pre-separator for air intake

POWERBULLY 12C

DIMENSIONS

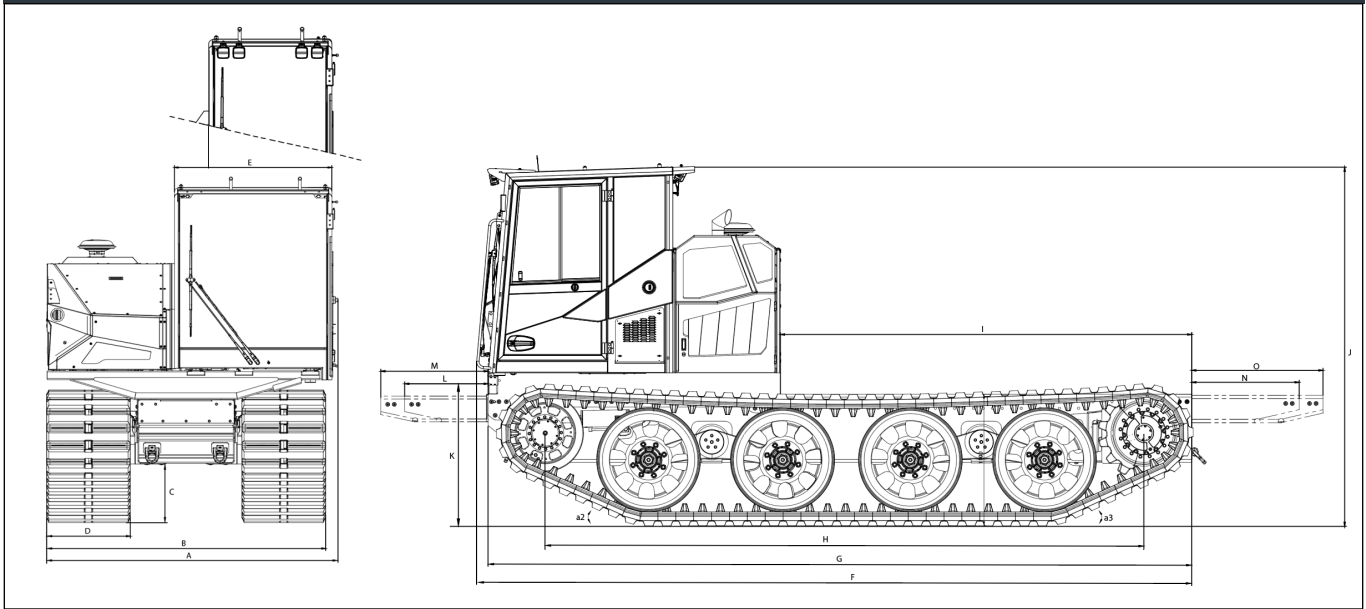

A 2,590 mm | 102"

B 2,500 mm | 98"

C 530 mm | 21"

D 750 mm | 29.5"

E 1,412 mm | 55.6"

Optional: Narrow cab E 982 mm | 39"

F 6,036 mm | 237.6"

G 5,900 mm | 232.3"

H 5,021 mm | 198"

I 3,450 mm | 135.8"

J 3,005 mm | 118"

K 1,300 mm | 51.2"

L 700 mm | 27.6"

M 900 mm | 35.4"

N 900 mm | 35.4"

O 1,100 mm | 43.3"

a2 24° a3 26°

INTERFACES

PTO for attachments

Power 126 kW (600 Nm)

Rotation speed 828 - 2,367 rpm

Transmission 1:0.845

Mechanical

Frame type C-shaped profile with pre-drilled hole patterns


Frame width 864 mm | 34"

Electrical

Power supply for attachments 12 V or 24 V

Attachment interface

OFF-ROAD ABILITIES

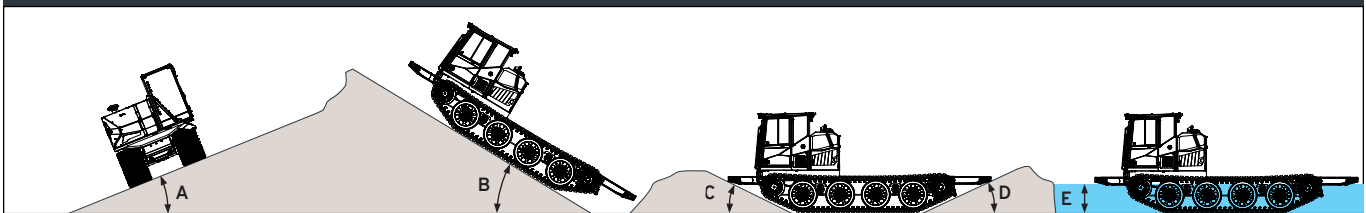

A Sidehill 40% | 22°

B Uphill | Downhill 60% | 31°

C Approach angle with 700 mm | 27.6" frame extension 28°
with 900 mm | 35.4" frame extension 24°

D Departure angle with 900 mm | 35.4" frame extension 29°
with 1,100 mm | 43.3" frame extension 24°

E Fording depth 1,300 mm | 51.9"



Learn more about PowerBully:
powerbully.com
sales@powerbully.com

PowerBully
TRACK CARRIER